



INSTRUCTIONS MANUAL

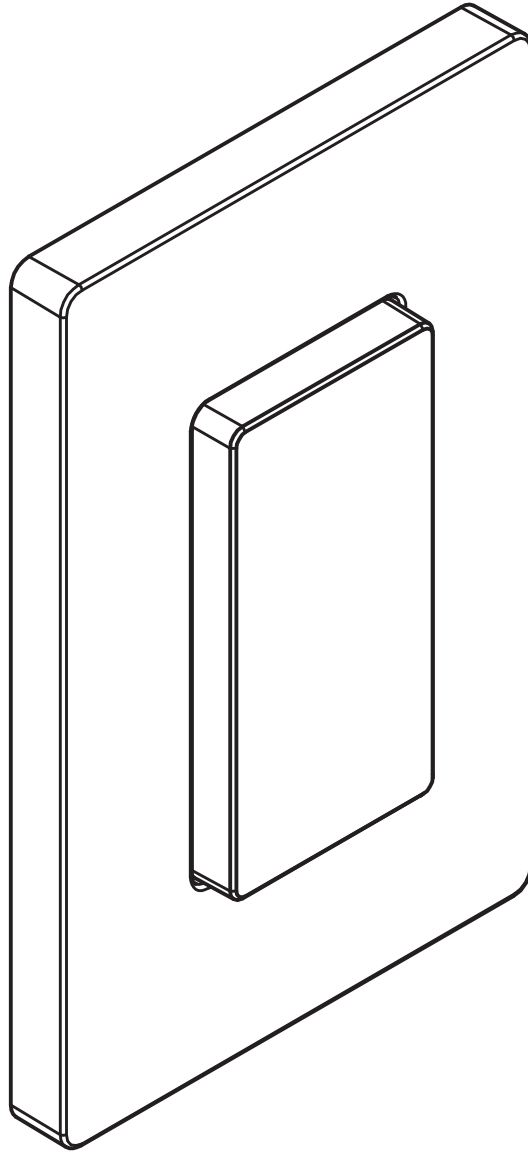

US Kinetic Switch | IK03

Ver 5.0

A. WHAT IS IN THE BOX ?




x 1



x 2




x 2



x 1





B. SPECIFICATIONS

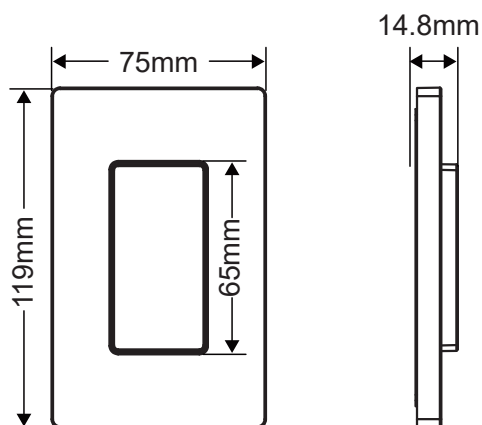

POWER SOURCE	Self Powered (Kinetic)
RADIO FRENQUENCY	433 Mhz
SWITCHING TYPE	Push Switch
DIMMING TYPE	Push Selected.
IP RATING	IP20
BODY MATERIAL	Polycarbonate
TRANSMISSION RANGE	Outdoor 60m (no barrier) Indoor 30m (plaster board; drywall) Indoor 15m (concret, glass walls) (Range may vary depending on surrounding situation)

C. COMPATIBLE CONTROLLERS (ORDER SEPERATELY.)


*Refer to the controller's instruction manual on how to pair the switch and controller.



D. INSTALLATION



Install on or close to metal surface would decrease the transmission range significantly. Suggest to keep away from metal surface at least 1m to get the best performance.

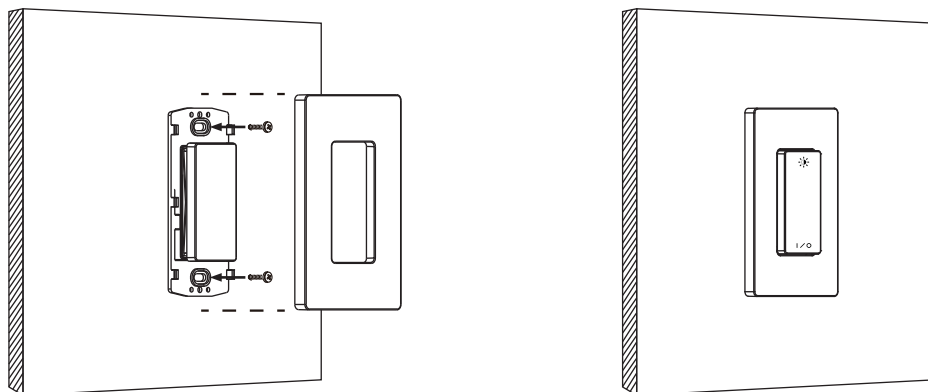


E. OPERATION

*The key function of the kinetic switch is based on the paired controller version.




On/ OFF: Press Once

Dimming: Press twice to enter dimming cycle, another press to set brightness

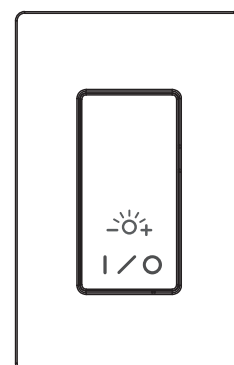

F. PAIRING LIMITATIONS

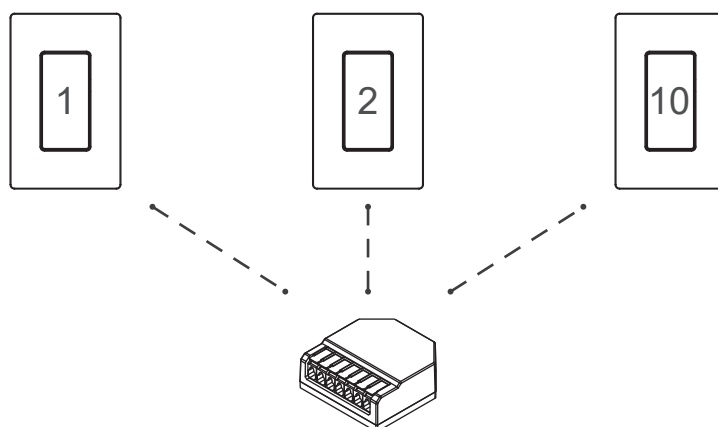

Max.10 Kinetic Switches to pair One Controller

*To avoid sync problem, we DO NOT suggest to pair multiple controller to one or multiple Kinetic Switches.