



INSTRUCTIONS MANUAL

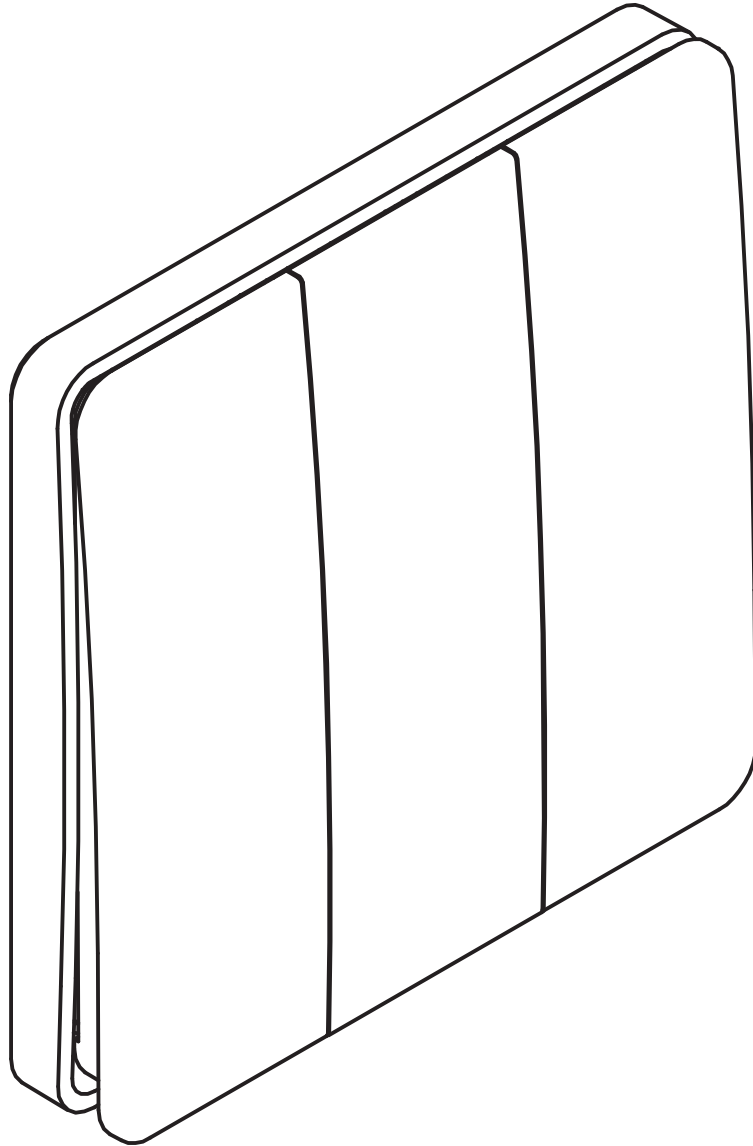


86 Series Kinetic Switch | IK01

Ver 6.0

A. WHAT IS IN THE BOX ?



x 1



x 2





x 2



x 1





B. SPECIFICATIONS

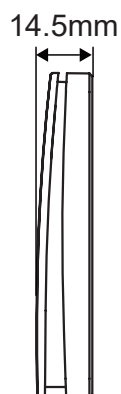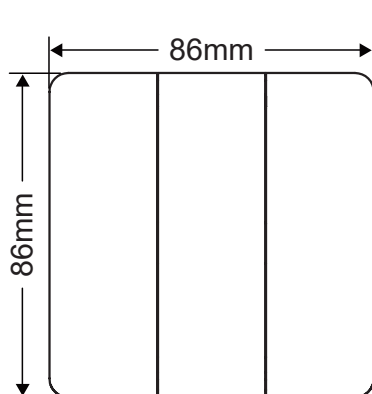

POWER SOURCE	Self Powered (Kinetic)
RADIO FREQUENCY	433 Mhz
SWITCHING TYPE	Push Switch
DIMMING TYPE	Press twice to enter dimming cycle.
IP RATING	IP65
BODY MATERIAL	Polycarbonate
TRANSMISSION RANGE	Outdoor 150m (no barrier) Indoor 25m (plaster board; drywall) Indoor 12m (concret, glass walls) (Range may vary depending on surrounding situation)

C. COMPATIBLE CONTROLLERS (ORDER SEPERATELY.)


***Refer to the controller's instruction manual on how to pair the switch and controller.**

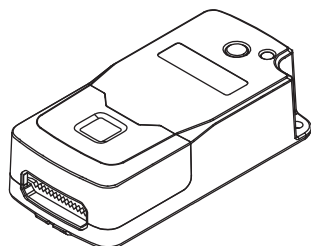


D. INSTALLATION

1. Screw Installation


- ① Remove front cover;

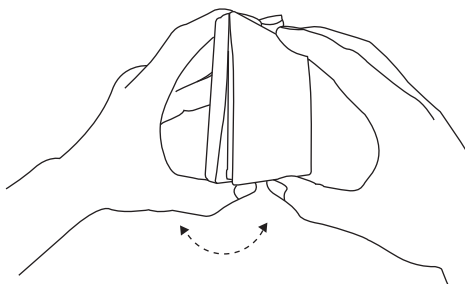


- ② Fix to back box;

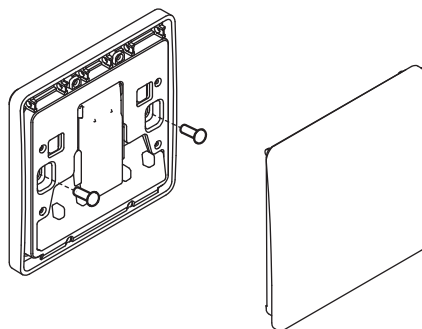

- ③ Reinstall front cover;

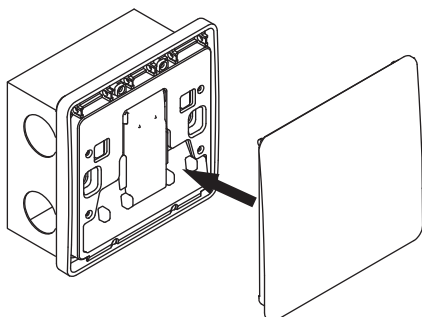

- ④ Installation Completed.

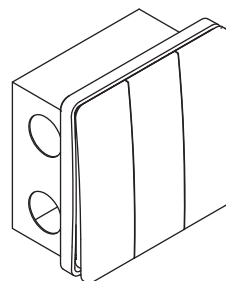


2. Surface Installation




Install on or close to metal surface would decrease the transmission range significantly. Suggest to keep away from metal surface at least 1m to get the best performance.


- ① Remove sticker cover;

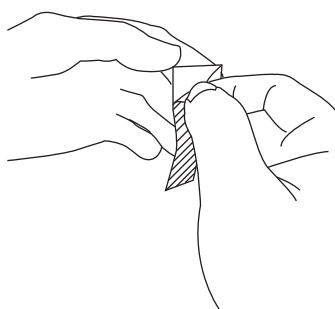


- ② Clean the surface

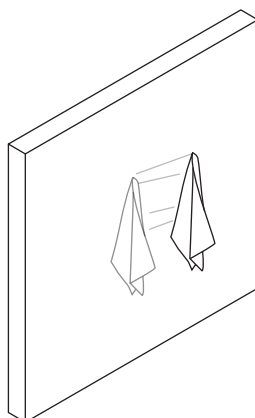

- ③ Apply to the switch;

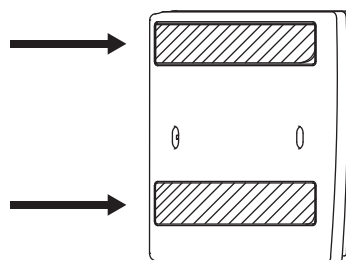

- ④ Attach the switch to surface.

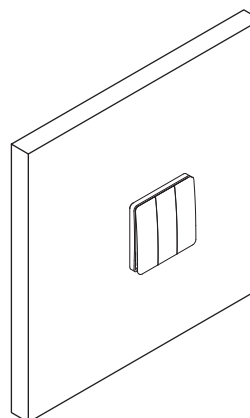


E. OPERATION

*The key function of the kinetic switch is based on the paired controller version.



On/ OFF: Press Once

Dimming: Press twice to enter dimming cycle, another press to set brightness

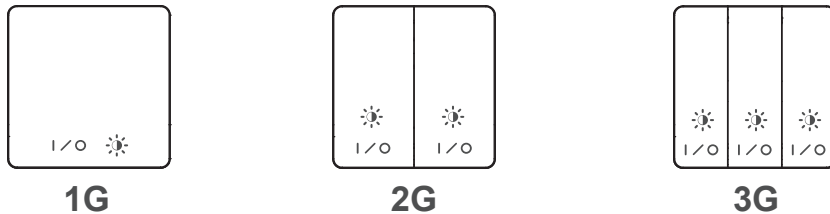


On/ Off: Press once

Dimming: Press the same key twice to enter dimming cycle, another press to set brightness.

CCT&RGB: Press left key once, enter to color change cycle, another press to set color temperature/color.

RGBW&RGBCW: Press left key to cycle CCT/color; double-press left key to toggle CW/RGB mode.

@ For RGBW & RGBCW, quickly press Left key twice to switch between RGB group and CW group.

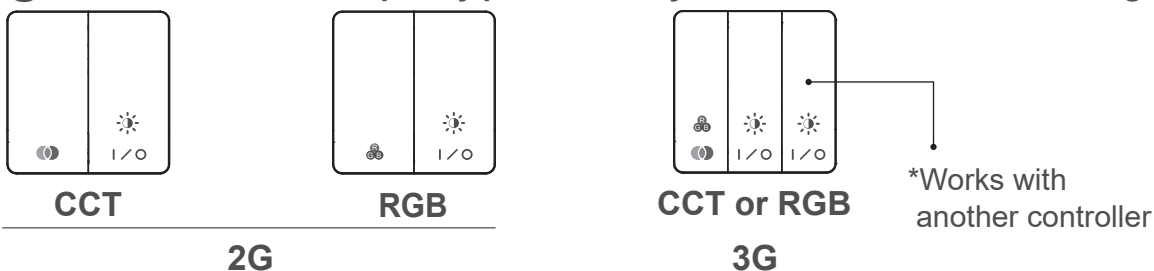


When the light is on, press the **On/Off Key** three times in a row to reset the brightness to its default level.


If all three buttons of the 3G Kinetic Switch are connected to the same On/Off controller, pressing any one of the **On/Off Key** three times consecutively will reset all connected lights to their default state (synchronized power-on and brightness).

*only applicable to On/Off controllers.

F. PAIRING LIMITATIONS

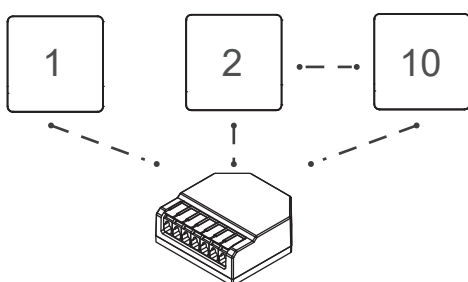

**Max.10 Kinetic Switches to pair
One Controller**

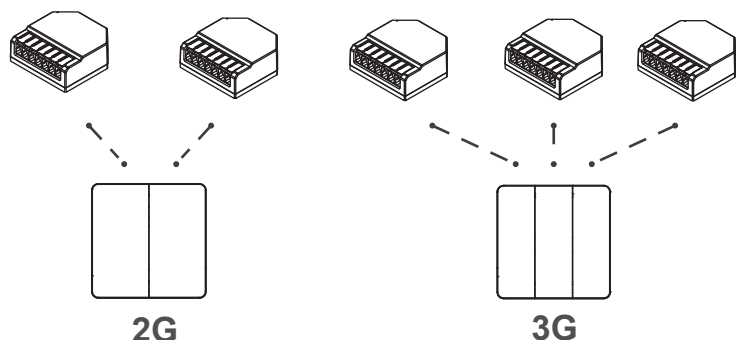

**Use One Kinetic Switch to pair Two / Three Controllers
(*On/Off & Dimmer Controller Version)**

*To avoid sync problem, we DO NOT suggest to pair multiple controller to one or multiple Kinetic Switches.