



INSTRUCTIONS MANUAL

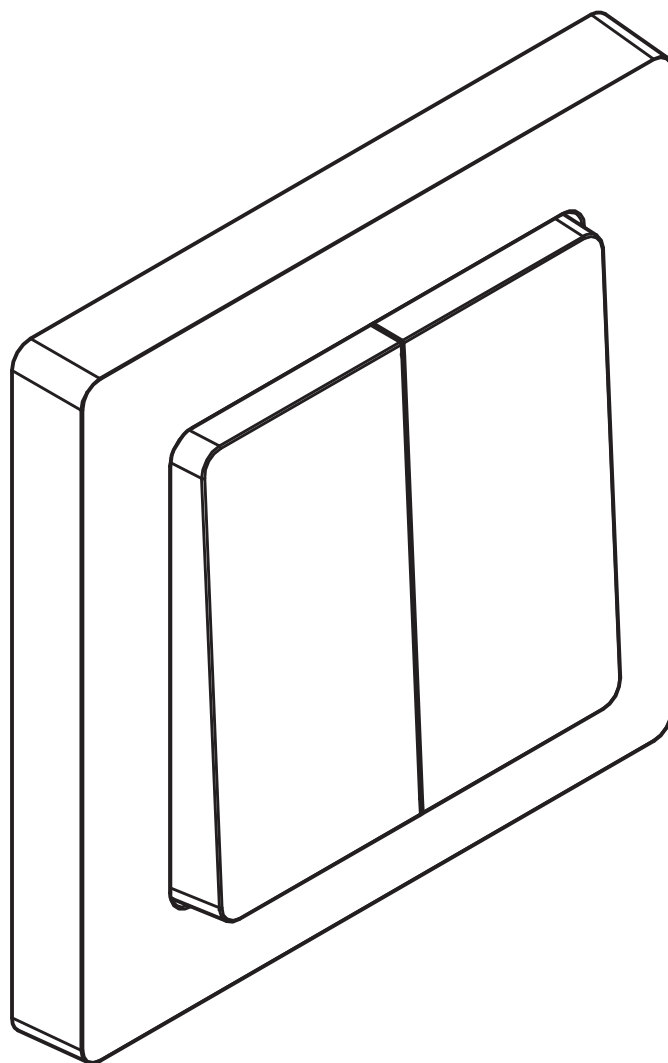

EU Kinetic Switch | IK02

Ver 5.0

A. WHAT IS IN THE BOX ?



x 1



x 2




x 2



x 1





B. SPECIFICATIONS

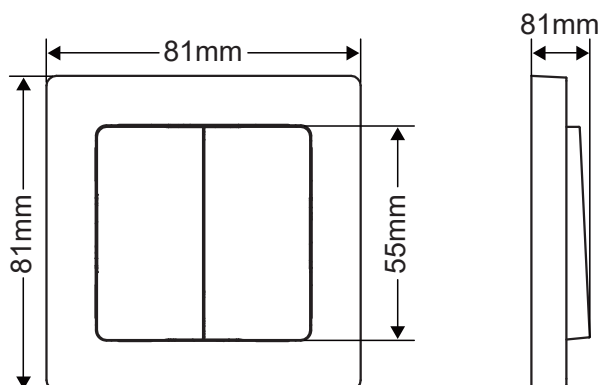

POWER SOURCE	Self Powered (Kinetic)
RADIO FRENQUENCY	433 Mhz
SWITCHING TYPE	Push Switch
DIMMING TYPE	Push Selected. Only available on 2 Gang Switch
IP RATING	IP20
BODY MATERIAL	Polycarbonate
TRANSMISSION RANGE	Outdoor 60m (no barrier) Indoor 30m (plaster board; drywall) Indoor 15m (concret, glass walls) (Range may vary depending on surrounding situation)

C. COMPATIBLE CONTROLLERS (ORDER SEPERATELY.)


*Refer to the controller's instruction manual on how to pair the switch and controller.




D. INSTALLATION

1. Screw Installation


- (a) Remove front cover;
Press around the casing, then use your thumb on the switch to separate it from the buttons.




- (b) Fix to back box;



- (c) Reinstall front cover;

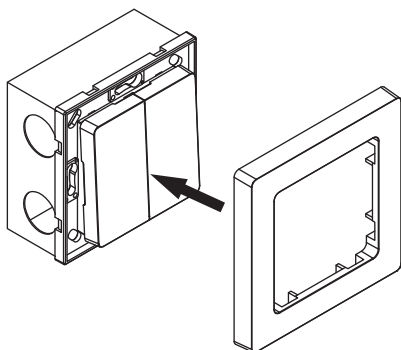

- (d) Installation Completed.




2. Surface Installation




Install on or close to metal surface would decrease the transmission range significantly. Suggest to keep away from metal surface at least 1m to get the best performance.


- (a) Remove sticker cover;




- (c) Clean the surface

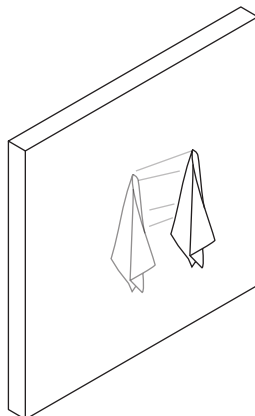

- (b) Apply to the switch;



- (d) Attach the switch to surface.

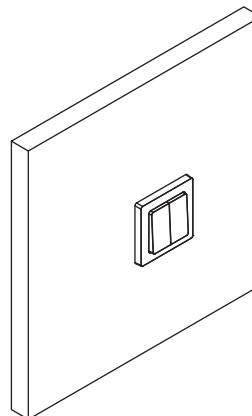


E. OPERATION

*The key function of the kinetic switch is based on the paired controller version.




On/ OFF: Press Once

Dimming: Press twice to enter dimming cycle, another press to set brightness



1G



2G




On/ Off: Press once


Dimming: Press the same key twice to enter dimming cycle, another press to set brightness.

CCT&RGB: Double press the left button to switch between CCT or RGB, another press to set color temperature/color.


@ For RGBW & RGBCW, quickly press Right key twice to switch between RGB group and CW group.



CCT




RGB




CCT&RGB

F. PAIRING LIMITATIONS

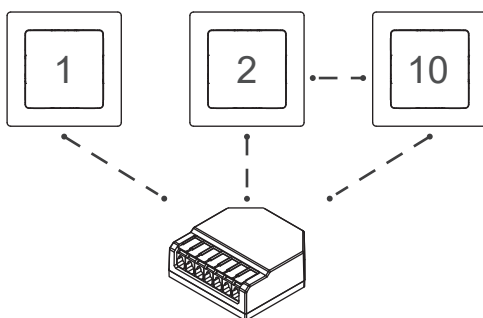

Max.10 Kinetic Switches to pair One Controller



2G

Use One Kinetic Switch to pair Two / Three Controllers

(*On/Off & Dimmer Controller Version)

*To avoid sync problem, we DO NOT suggest to pair multiple controller to one or multiple Kinetic Switches.